

Project	
Date	
Prepared By	
Model #	LSLIM4CCTWH2T

LED 4" Slim Downlight

650 Lumens, 9 Watt, Color Selectable

Specifications

ELECTRICAL

Watts: 9
Voltage: 120VAC
Power Factor: 0.97
Operating Temp. Range:
-40°F to 135°F

LIGHT

Initial Lumens: 650
Lumens per Watt: 70.8

Color Temperature:
2700K, 3000K, 3500K,
4000K and 5000K


CRI: 81
Dimmable: Yes

AGENCY APPROVALS

ETL: Yes
FCC: Yes
IC Rated: Yes

PRODUCT DETAILS

Lens: Acrylic
Warranty: 5 years
Fixture
Rated Life: 50,000 hours
Weight: 1.18 LBS
Dimensions:
4.72" Diameter



ORDER CODE:
11696

MODEL NUMBER:
LSLIM4CCTWH2T

WATTS: 9

LUMENS: 650

PRODUCT DESCRIPTION

4" Slim IC-Rated LED Downlight features five color selectable operation. Switch between 2700K, 3000K, 3500K, 4000K and 5000K easily at the time installation. These slim fixtures can be easily installed in finished drywall or architectural tile ceilings in both commercial and residential applications where space is an issue. They can also be used to retrofit existing recessed downlight fixtures. This fixture provides 71 lumens per watt with a high 80+ CRI for improved visual acuity and efficient performance. It features smooth dimming down to ten percent on typical incandescent dimmer controls. It is IC-rated for use in insulated ceilings and meets IECC air leakage requirements to provide a versatile and attractive downlight product. UL Wet Location listed for use in high humidity areas and bathroom showers. These fixtures are designed for easy installation. For use on 120VAC power supplies.

PRODUCT FEATURES

- + 5 color light selection assures you of the proper light color for every installation
- + Conforms to UL Std.1598, certified to CSA Standard C22.2 No. 250.0
- + Edge-Lit LED technology provides even illumination
- + Driver is Class 2, FT-6 rated cord
- + IC-Rated & ICC Air Lock
- + 50,000 hour rated life
- + IC Rated
- + Wet Location

APPLICATIONS

- + Hotel Rooms
- + Long-term care facilities
- + Bathrooms
- + Schools
- + Hospitals
- + Office Buildings
- + Commercial
- + Residential

Please consult installation instructions for proper application and use of this fixture.
*Rebate availability access it here: www.earthtronics.com/rebate-finder



DAYLIGHT	5000K
COOL WHITE	4000K
BRIGHT WHITE	3500K
WHITE	3000K
SOFT WHITE	2700K

PACKAGE DETAILS

INDIVIDUAL PACKAGE

Individual Carton Qty: 1

Dimensions:

5.59" Length x 3.15" Width x 5.71" Height

Weight: 0.95 LBS

UPC: 840791116968

MASTER CARTON

Master Carton Qty: 6

Dimensions:

9.45" Length x 11.77" Width x 6.30" Height

Weight: 21.30 LBS

UPC: 84079111696800

INSTALLATION

Fig. 1




Fig. 2




Fig. 3

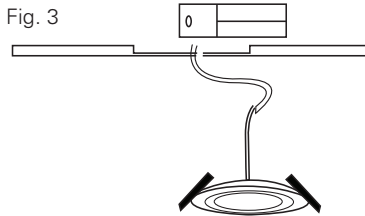


Fig. 4




Fig. 5

