

Project	
Date	
Prepared By	
Model #	HBU300WSCCTB1S

Specifications

ELECTRICAL

Watts: 200, 240, 300
 Voltage: 120/277V
 Power Factor: ≥ 0.9
 THD: $\leq 20\%$
 Operating Temp. Range:
 -40°C (-40°F) to 50°C (122°F)

LIGHT

Highest Lumens: 48000
 Lumens per Watt: 160
 Color Temperature: 4000K
 & 5000K
 CRI: 83
 Dimming: 0-10V

AGENCY APPROVALS

UL/cUL: Yes
 IP65: Yes
 ETL Sanitation: Listed to
 NSF STD. 2
 DLC® Premium: Yes

PRODUCT DETAILS

Housing:
 Die-cast Aluminum Alloy
Warranty: 5 years **Fixture**
Warranty Life: 50,000 hours
Weight: 6.17 lbs
Dimensions:
 7.4" Height, 13.8" Diameter

UFO LED Highbay

Color & Wattage Selectable



ORDER CODE:
11889

MODEL NUMBER:
HBU300WSCCTB1S

COLOR SELECTABLE:
4000K or 5000K

LUMEN LEVELS:
 32000 lumens - 200 watts
 38400 lumens - 240 watts
 48000 lumens - 300 watts

DLC® PRODUCT ID:
S-G2C84R

Rebate Availability*

PRODUCT DESCRIPTION

EarthTronics LED Highbay delivers excellent energy savings then replacing up to a 1000 watt HID fixtures. This UFO high bay fixture has a 138" diameter design and produces up to 48000 lumens. It features color selection options of 4000K or 5000K with a high 80+ CRI providing excellent visual acuity for accuracy when working in manufacturing and warehousing applications. This fixture has a unique open center ventilated LED array afford excellent heat dissipation providing high lumen maintenance over its service life. This UFO Highbay is IP65 rated for wet locations and the housing is corrosion resistant die-cast aluminum. This fixture is also ETL Sanitation Listed (conforms to NSF STD.2) for use in food processing and other clean room applications. 0-10V dimming standard and compatible with several controls. High quality LED chips provide for excellent lumen maintenance. This UFO High Bay ships with a standard 6' 18/3 SJT whip, 0-10v dimming wires and mounting hooks. DLC® Premium.

PRODUCT FEATURES

- + 120/277V, DLC® Premium
- + Ships with standard 6' 18/3 SJT whip, 1-10v dimming wires and mounting hooks
- + Feature 2-stage color temperature adjustment, 3-stage brightness adjustment
- + IP65 wet location rated
- + Operating at 160 lumens per watt
- + Polycarbonate lens
- + ETL Sanitation Listed (conforms to NSF STD.2)
- + Corrosion resistant die-cast aluminum housing
- + Driver standard with 0-10V dimming (prewired)

PRODUCT DIMENSIONS



PACKAGE DETAILS


Dimensions: 16.46" x 16.46" x 7.17"

Weight: 8.93 lbs


UPC: 840791118894

COLOR & WATTAGE SELECTION OPTIONS

Step 1:
Remove the rubber pad from the driver

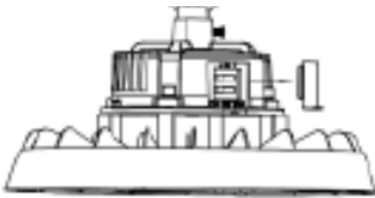


Step 2:
Use the slide switch to select wattage and color temperature

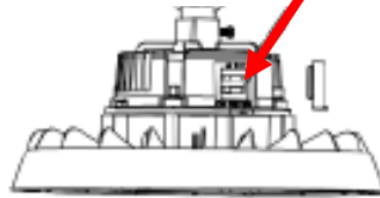


Step 3:
Attach the rubber pad to the driver




OPTIONAL ACCESSORIES



Trunion Mount Order Code: 11893




Wire Guard Order Code: 11892



12VDC Microwave Sensor
Order Code: 11795

*Remote Control Order Code: 11796



PC Reflector
Order Code: 11891



Emergency Battery Pack
Order Code: 11499

* **Note:** One remote control (11796) for multiple microwave sensors.

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - Highbay UFO](#)

www.earthtronics.com/rebate-finder/catalog/

